

1080P HD-TVI Vari Focal IR Bullet

XV-BL2020-TH


- 1080P HD-TVI IR Bullet
- 2.8~12mm DC Auto Iris Vari Focal ICR Lens
- True Day & Night
- 14pcs Hyper IR LEDs

Features

1/2,7" 2 Mega Pixels CMOS Image Sensor
- Progressive Scan
Adopt HD TVI Technology
- High Image Quality at 1080p
- Natural Color Reproduction and clear & vivid image
- Enhanced Local Real-time Surveillance Image Quality
- Same Installation Structure as Analog System
Automatic Control
- AGC, AWB, AEC (Automatic Exposure Control), etc.
2.8~12mm DC Auto Iris Vari Focal ICR Lens
True Day & Night with ICR Mechanism
Built-in 14pcs Hyper IR LEDs
Weather Proof Bullet Case, Cable Built-in Concealed Bracket
DC 12V Power Voltage



Dimensions

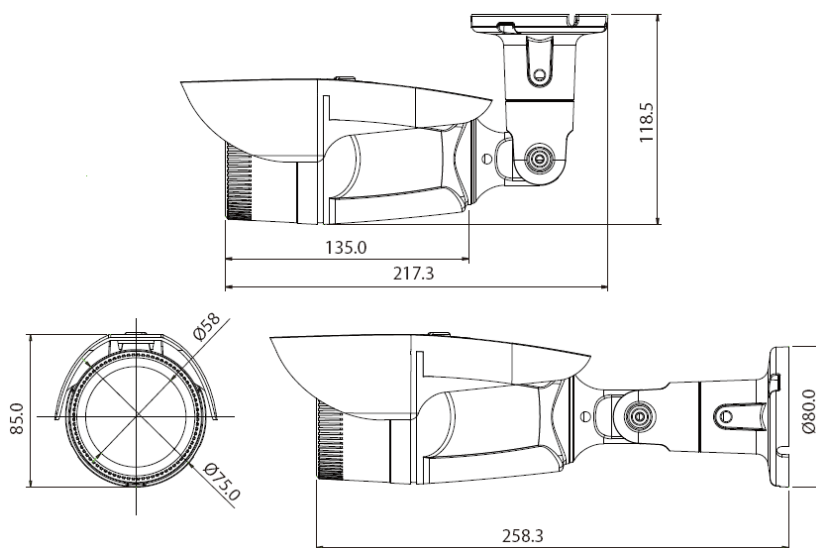

Specification

Image Sensor	1/2.7" 2 Mega Pixels CMOS Image Sensor
Active Pixel Array	1920(H)*1080(V)
Max. Image Transfer Rate	1080p@25fps / 1080p@30fps
Signal System	NTSC / PAL
Scanning System	Progressive Scan
Video Output	HD TVI OUTPUT
Sensitivity	3.0 V/Lux.Sec
S/N Ratio	39.9 dB
Shutter	DC Auto Iris
Lens	2.8~12mm DC Auto Iris Vari Focal ICR Lens
IR LEDs	14pcs Hyper IR LEDs
True Day & Night	Support
BACKLIGHT	Level Setting (0 ~ 16)
FLICKER	OFF / 50Hz / 60Hz
ETC.	Sharpness, Contrast, Privacy, Color Gain, etc.
Power Input	DC+12V±10%
Operating Temperature	Absolute : -20°C~ + 70°C (-4 °F~158 °F)
Operating Humidity	Less than 90%
Dimension	75Φ × 135.0mm / Approx. 1,200g

1080P HD-TVI Fixed IR Bullet

XV-BL2010-TR


- 1080P HD-TVI IR Bullet
- 3.6mm Fixed Iris Lens
- True Day & Night
- 63pcs IR LEDs

Features

- 1/2,7" 2 Mega Pixels CMOS Image Sensor
- Progressive Scan
- Adopt HD TVI Technology
- High Image Quality at 1080p
- Natural Color Reproduction and clear & vivid image
- Enhanced Local Real-time Surveillance Image Quality
- Same Installation Structure as Analog System
- Automatic Control
- AGC, AWB, AEC (Automatic Exposure Control), etc.
- 3.6mm Fixed Lens
- True Day & Night with ICR Mechanism
- Built-in 63pcs IR LEDs
- Weather Proof Bullet Case, Cable Built-in Concealed Bracket
- DC 12V Power Voltage



Dimensions

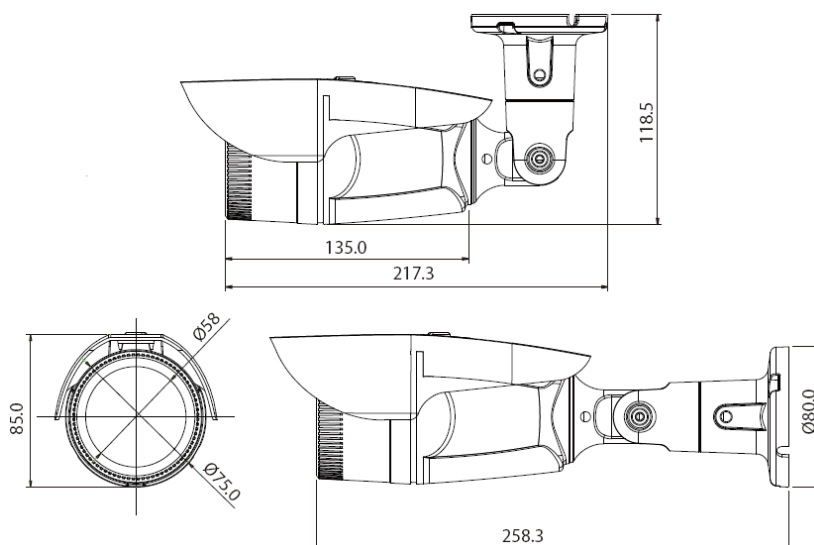

Specification

Image Sensor	1/2.7" 2 Mega Pixels CMOS Image Sensor
Active Pixel Array	1920(H)*1080(V)
Max. Image Transfer Rate	1080p@25fps / 1080p@30fps
Signal System	NTSC / PAL
Scanning System	Progressive Scan
Video Output	HD TVI OUTPUT
Sensitivity	3.0 V/Lux.Sec
S/N Ratio	39.9 dB
Shutter	DC Auto Iris
Lens	3.6 mm Fixed Lens (with ICR Mechanism)
IR LEDs	63pcs IR LEDs
True Day & Night	Support
BACKLIGHT	Level Setting (0 ~ 16)
FLICKER	OFF / 50Hz / 60Hz
ETC.	Sharpness, Contrast, Privacy, Color Gain, etc.
Power Input	DC+12V±10%
Operating Temperature	Absolute : -20°C~ + 70°C (-4 °F~158 °F)
Operating Humidity	Less than 90%
Dimension	75Φ × 135.0mm / Approx. 1,200g